


SPECIFICATIONS:

- °MAXIMUM PRESSURE RATING 200 PSI (14 BAR)
- °FLOW RANGE: 3–130 GPM (10–495 l/min)
- °WETTED MATERIALS: POLYPROPYLENE, STAINLESS STEEL, RUBY, SAPPHIRE, VITON®

ELECTRICAL SPECIFICATIONS:

- °OPEN COLLECTOR NPN
- °50% SQUARE WAVE
- °10–300hz FREQUENCY RANGE
- °APPROXIMATE CALIBRATION: 21 PULSES/I
79 PULSES/GAL
- °LED INDICATORS: GREEN – POWER
ORANGE – SIGNAL
- °RED WIRE = +4.5 TO 16V
WHITE WIRE = SIGNAL
BLACK WIRE = GROUND

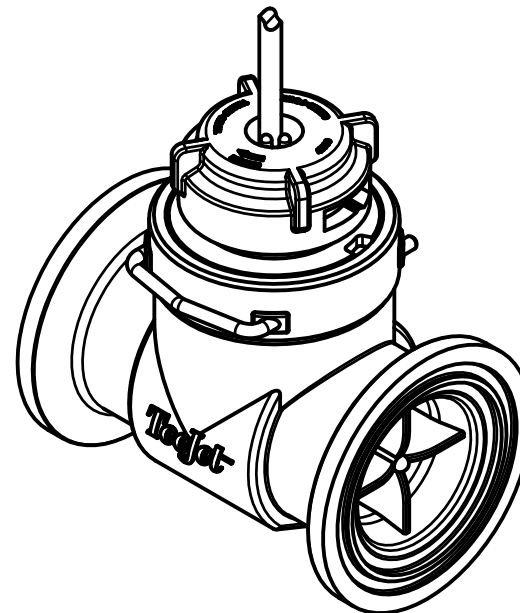

FEATURES INCLUDE:

- °FLANGE CONNECTION FOR EASY CONNECTIONS TO OTHER COMPONENTS
- °EFFICIENT HELICAL TURBINE DESIGN
- °PINNED TURBINE/SENSOR ASSEMBLY FOR EASY CLEANING AND MAINTENANCE
- °THREE PIN DEUTSCH DT MALE CONNECTOR FOR DIRECT COMPATIBILITY WITH TEEJET 800 SERIES WIRING HARNESS (TEEJET RB)
- °THREE PIN CONXALL® CONNECTOR VERSION IS COMPATIBLE WITH RAVEN WIRING HARNESS.

ORDERING INFORMATION:

- 57–10122: FLOW METER ASSEMBLY, DEUTSCH CONNECTOR
- 57–10125: FLOW METER ASSEMBLY, CONXALL® CONNECTOR

DESCRIPTION:	
802 FLOW METER	
REVISION NO.	DATA SHEET
REFERENCE:	DS802
9/6/2012	SHEET: 1 OF 1
	DWG SIZE: A



Spraying Systems Co.®
 Spray Nozzles and Accessories
 P.O. Box 7900 - Wheaton, IL 60189-7900