


Fortset med de øvrige sektioner.

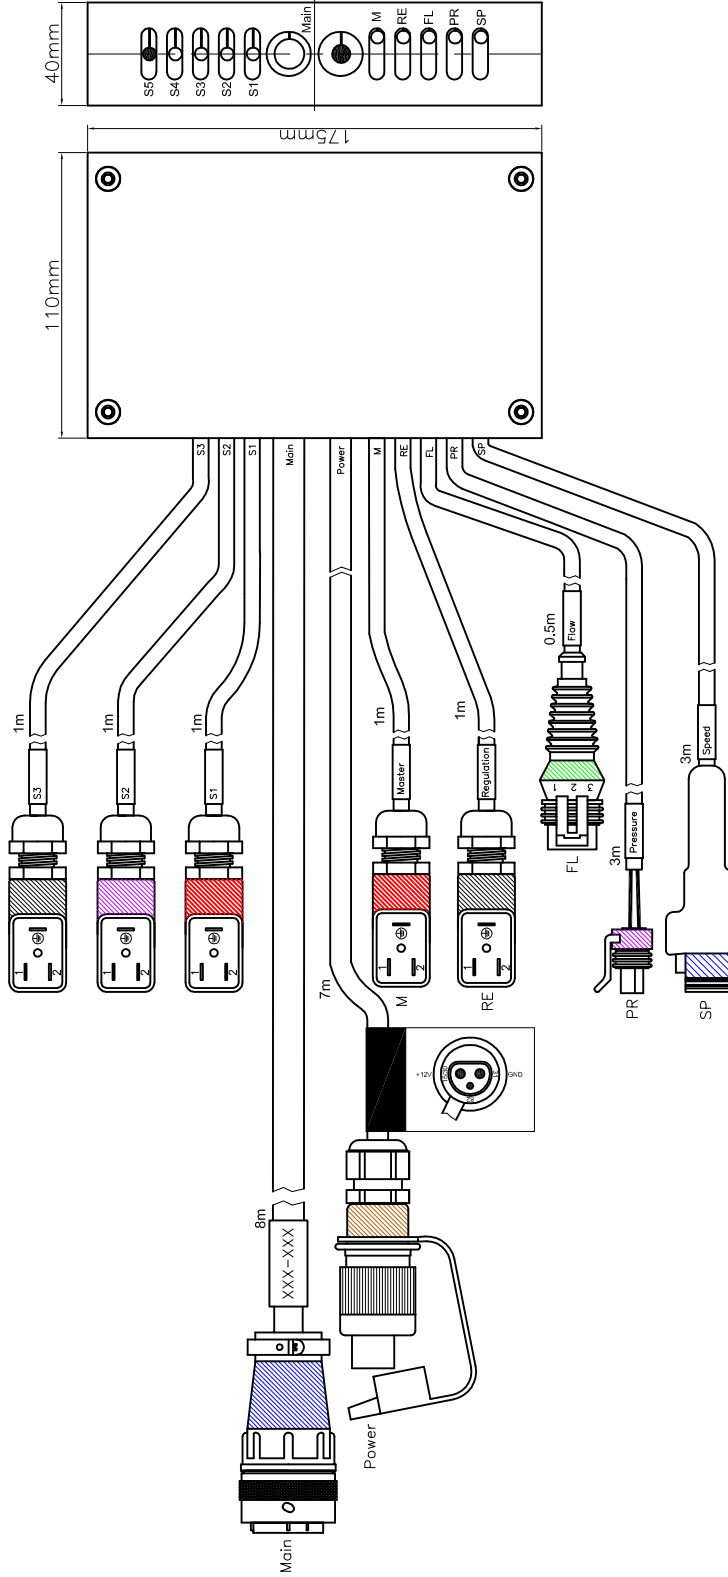


| Con./Pin | Cable | Signal | Color |
|----------|-------|--------|-------|
| S4_1     | S4    | S4_NH  | Brown |
| S4_2     | S4    | S4_NL  | Blue  |
| S3_1     | S3    | S3_NH  | Blue  |
| S3_2     | S3    | S3_NL  | Blue  |
| S2_1     | S2    | S2_NH  | Brown |
| S2_2     | S2    | S2_NL  | Blue  |
| S1_1     | S1    | S1_NH  | Brown |
| S1_2     | S1    | S1_NL  | Blue  |

| Con./Pin | Cable | Signal    | Color        |
|----------|-------|-----------|--------------|
| Main, A  | Main  | Master    | White        |
| Main, B  | Main  | Section 1 | Brown        |
| Main, C  | Main  | Section 2 | Yellow       |
| Main, D  | Main  | Section 3 | Yellow       |
| Main, E  | Main  | Section 4 | Grey         |
| Main, F  | Main  | Section 5 | Grey         |
| Main, G  | Main  | NC        | Blue         |
| Main, H  | Main  | NC        | Black        |
| Main, I  | Main  | NC        | Black        |
| Main, J  | Main  | NC        | Black        |
| Main, K  | Main  | NC        | Violet       |
| Main, L  | Main  | NC        | Grey/pink    |
| Main, M  | Main  | NC        | Red/blue     |
| Main, N  | Main  | NC        | Red/blue     |
| Main, O  | Main  | NC        | White/green  |
| Main, P  | Main  | NC        | White/green  |
| Main, Q  | Main  | Flow      | Yellow/brown |
| Main, R  | Main  | Flow      | Yellow/brown |
| Main, S  | Main  | Pressure  | White/grey   |
| Main, T  | Main  | Speed     | Grey/brown   |
| Main, U  | Main  | PWR       | White/pink   |
| Main, V  | Main  | PWR       | White/pink   |
| Main, W  | Main  | Reg. +    | White/pink   |
| Main, X  | Main  | Reg. +    | Pink/brown   |
| Main, Y  | Main  | Reg. -    | White/blue   |
| Main, Z  | Main  | Reg. -    | White/blue   |
| Main, a  | Main  | Master_in | Brown/blue   |
| Main, b  | Main  | Master_in | Brown/blue   |
| Main, c  | Main  | GND       | White/red    |
| Main, d  | Main  | GND       | White/red    |
| Main, e  | Main  | +12V      | Brown/red    |

| Con./Pin         | Cable | Signal | Color |
|------------------|-------|--------|-------|
| Power, - (S1)    | Power | GND    | Blue  |
| Power, + (S2/S3) | Power | +12V   | Brown |

| Con./Pin | Cable | Signal | Color |
|----------|-------|--------|-------|
| M_1      | M     | M_NL   | Brown |
| M_2      | M     | M_NH   | Blue  |
| RE_1     | RE    | RE_+   | Brown |
| RE_2     | RE    | RE_+   | Blue  |
| FL_1     | FL    | PWR    | Brown |
| FL_2     | FL    | PWR    | Brown |
| FL_3     | FL    | FL     | Black |
| FL_4     | FL    | GND    | Blue  |
| PR_1     | PR    | PR     | Blue  |
| PR_2     | PR    | PR     | Blue  |
| SP_A     | SP    | PWR    | Brown |
| SP_B     | SP    | SP     | Black |
| SP_C     | SP    | SP     | Black |
| SP_D     | SP    | GND    | Blue  |

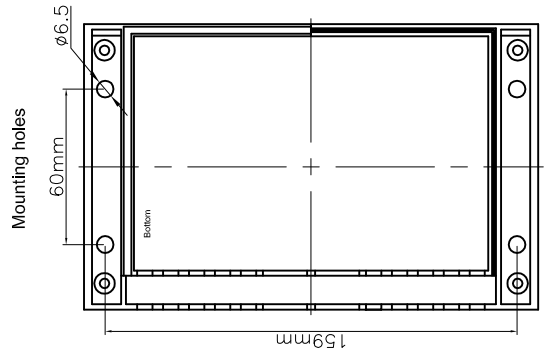

|      |                                   |            |
|------|-----------------------------------|------------|
| E    | Changed flow connector            | RCH/260615 |
| D    | Changed flow connector            | RCH/100914 |
| C    | Changed into Keller PR sens       | RCH/230813 |
| B    | Changed conn. for FL              | RCH/260911 |
| A    | Added back shell caps for Deutsch | RCH/100111 |
| Rev. | Description                       | By/date    |

|                   |  |       |
|-------------------|--|-------|
| Idea by/date:     | RCH/191110   | Scale |
| Drawn by/date:    | RCH/191110   |       |
| Approved by/date: |  |       |
| Dwg. type:        | Manual/sale  |       |
| Project:          | Spray cable  |       |
| Title:            | Spray cable 4x DPDT, M(1m), SP(3m), PR Keller(3m), FL(0.5m), 8m, 199-361 |       |



Mølhavevej 2  
DK-9440 Aabybro  
Tel: +45 96962500  
Fax: +45 96962501

No.: 4808-0035 E