


TTI TWINJET®

AIR INDUCTION TWIN FLAT SPRAY TIPS

The TTI60 TeeJet air induction twin flat spray tip provides extremely large droplets for maximum drift control along with the improved coverage of a twin spray. The single piece tip & cap design allows for fast, easy installation and, unlike some other twin sprays, has a very compact size. The TTI60 is ideal for the application of systemic, post-emerge herbicides.

FEATURES:

- TTI60 produces two 110° wide angle, flat spray patterns for uniform coverage in broadcast applications.
- 60° angle between leading and trailing patterns for increased canopy penetration and leaf coverage.
- All in one molded nozzle and Quick TeeJet® cap design provides automatic spray alignment.
- Extremely large drift resistant droplets are produced through the use of a venturi air aspirator.
- Provides excellent drift control and produces minimal driftable fines - less than 1.5%*.
- Acetal construction for excellent chemical and wear resistance.
- Removable pre-orifice allows for disassembly and cleaning.
- Suggested spray pressure range of 20-100 PSI (1.5-7 bar).

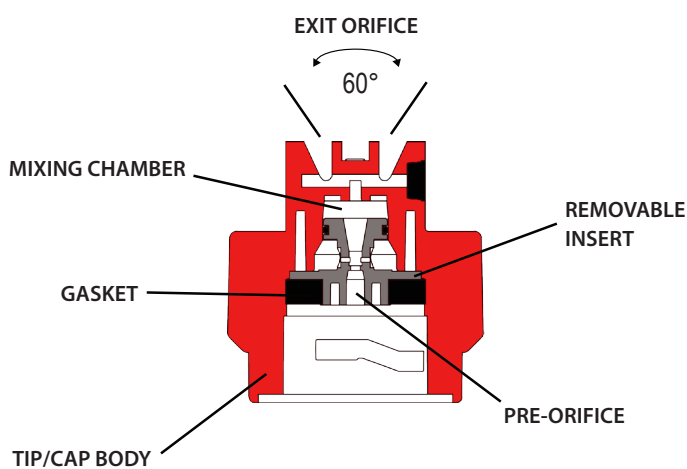


TTI60 CROSS-SECTIONAL VIEW


TTI60 SPRAY TIP



DROPLET SIZE AND COVERAGE



TURBO TEEJET® (TT)
(M Droplets)











TTI TWINJET® (TTI60)
(XC Droplets)

SELECTION GUIDE









CONTACT PRODUCT	SYSTEMIC PRODUCT	DRIFT MANAGEMENT
N/A	EXCELLENT	EXCELLENT

* -04 capacity spraying water at 40 PSI (2.8 bar). Driftable fines defined as droplets smaller than 150 microns.

APPLICATION INFORMATION

Icon	Pressure (bar)	DROPSIZE	CAPACITY ONE NOZZLE IN L/MIN	l/ha 												
				4 km/h	5 km/h	6 km/h	7 km/h	8 km/h	10 km/h	12 km/h	16 km/h	18 km/h	20 km/h	25 km/h	30 km/h	35 km/h
	1.5	UC	0.56	168	134	112	96.0	84.0	67.2	56.0	42.0	37.3	33.6	26.9	22.4	19.2
	2.0	UC	0.65	195	156	130	111	97.5	78.0	65.0	48.8	43.3	39.0	31.2	26.0	22.3
	3.0	XC	0.79	237	190	158	135	119	94.8	79.0	59.3	52.7	47.4	37.9	31.6	27.1
	4.0	VC	0.91	273	218	182	156	137	109	91.0	68.3	60.7	54.6	43.7	36.4	31.2
	5.0	VC	1.02	306	245	204	175	153	122	102	76.5	68.0	61.2	49.0	40.8	35.0
	6.0	VC	1.12	336	269	224	192	168	134	112	84.0	74.7	67.2	53.8	44.8	38.4
	7.0	C	1.21	363	290	242	207	182	145	121	90.8	80.7	72.6	58.1	48.4	41.5
	1.5	UC	0.70	210	168	140	120	105	84.0	70.0	52.5	46.7	42.0	33.6	28.0	24.0
	2.0	UC	0.81	243	194	162	139	122	97.2	81.0	60.8	54.0	48.6	38.9	32.4	27.8
	3.0	XC	0.99	297	238	198	170	149	119	99.0	74.3	66.0	59.4	47.5	39.6	33.9
	4.0	VC	1.14	342	274	228	195	171	137	114	85.5	76.0	68.4	54.7	45.6	39.1
	5.0	VC	1.28	384	307	256	219	192	154	128	96.0	85.3	76.8	61.4	51.2	43.9
	6.0	VC	1.40	420	336	280	240	210	168	140	105	93.3	84.0	67.2	56.0	48.0
	7.0	C	1.51	453	362	302	259	227	181	151	113	101	90.6	72.5	60.4	51.8
	1.5	UC	0.83	249	199	166	142	125	99.6	83.0	62.3	55.3	49.8	39.8	33.2	28.5
	2.0	UC	0.96	288	230	192	165	144	115	96.0	72.0	64.0	57.6	46.1	38.4	32.9
	3.0	UC	1.18	354	283	236	202	177	142	118	88.5	78.7	70.8	56.6	47.2	40.5
	4.0	XC	1.36	408	326	272	233	204	163	136	102	90.7	81.6	65.3	54.4	46.6
	5.0	XC	1.52	456	365	304	261	228	182	152	114	101	91.2	73.0	60.8	52.1
	6.0	VC	1.67	501	401	334	286	251	200	167	125	111	100	80.2	66.8	57.3
	7.0	VC	1.80	540	432	360	309	270	216	180	135	120	108	86.4	72.0	61.7
	1.5	UC	1.12	336	269	224	192	168	134	112	84.0	74.7	67.2	53.8	44.8	38.4
	2.0	UC	1.29	387	310	258	221	194	155	129	96.8	86.0	77.4	61.9	51.6	44.2
	3.0	UC	1.58	474	379	316	271	237	190	158	119	105	94.8	75.8	63.2	54.2
	4.0	XC	1.82	546	437	364	312	273	218	182	137	121	109	87.4	72.8	62.4
	5.0	XC	2.04	612	490	408	350	306	245	204	153	136	122	97.9	81.6	69.9
	6.0	VC	2.23	669	535	446	382	335	268	223	167	149	134	107	89.2	76.5
	7.0	VC	2.41	723	578	482	413	362	289	241	181	161	145	116	96.4	82.6
	1.5	UC	1.39	417	334	278	238	209	167	139	104	92.7	83.4	66.7	55.6	47.7
	2.0	UC	1.61	483	386	322	276	242	193	161	121	107	96.6	77.3	64.4	55.2
	3.0	UC	1.97	591	473	394	338	296	236	197	148	131	118	94.6	78.8	67.5
	4.0	XC	2.27	681	545	454	389	341	272	227	170	151	136	109	90.8	77.8
	5.0	XC	2.54	762	610	508	435	381	305	254	191	169	152	122	102	87.1
	6.0	VC	2.79	837	670	558	478	419	335	279	209	186	167	134	112	95.7
	7.0	VC	3.01	903	722	602	516	452	361	301	226	201	181	144	120	103
	1.5	UC	1.68	504	403	336	288	252	202	168	126	112	101	80.6	67.2	57.6
	2.0	UC	1.94	582	466	388	333	291	233	194	146	129	116	93.1	77.6	66.5
	3.0	UC	2.37	711	569	474	406	356	284	237	178	158	142	114	94.8	81.3
	4.0	XC	2.74	822	658	548	470	411	329	274	206	183	164	132	110	93.9
	5.0	XC	3.06	918	734	612	525	459	367	306	230	204	184	147	122	105
	6.0	VC	3.35	1005	804	670	574	503	402	335	251	223	201	161	134	115
	7.0	VC	3.62	1086	869	724	621	543	434	362	272	241	217	174	145	124
	1.5	UC	2.23	669	535	446	382	335	268	223	167	149	134	107	89.2	76.5
	2.0	UC	2.58	774	619	516	442	387	310	258	194	172	155	124	103	88.5
	3.0	UC	3.16	948	758	632	542	474	379	316	237	211	190	152	126	108
	4.0	UC	3.65	1095	876	730	626	548	438	365	274	243	219	175	146	125
	5.0	UC	4.08	1224	979	816	699	612	490	408	306	272	245	196	163	140
	6.0	XC	4.47	1341	1073	894	766	671	536	447	335	298	268	215	179	153
	7.0	XC	4.83	1449	1159	966	828	725	580	483	362	322	290	232	193	166

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C).

 EXTREMELY FINE	 VERY FINE	 FINE	 MEDIUM	 COARSE	 VERY COARSE	 EXTREMELY COARSE	 ULTRA COARSE	Droplet Size Categories may vary with nozzle capacity, spray angle and spray pressure
--	---	--	--	--	---	--	--	---

How To Order:

Example:

PART NUMBER	DESCRIPTION
TTI60-11002VP	Polymer with VisiFlo® color-coding

OPTIMUM SPRAY HEIGHT

